


Simply HD 21/1-5 (Universal)

As of 01/2015

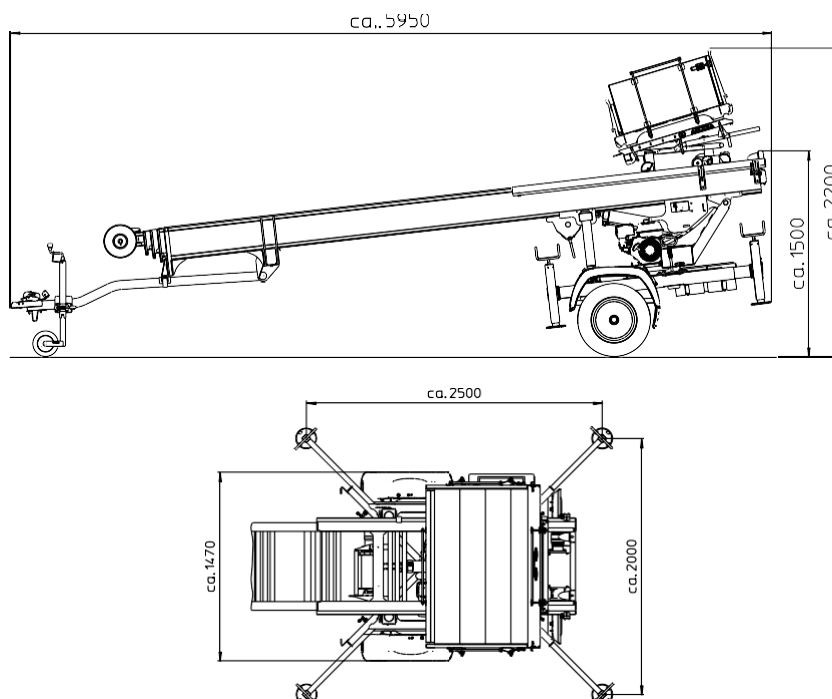

Description		Data
Permissible total weight (=axle load)		750 kg
Payload		up to 250 kg
Vehicle length		approx. 5950 mm
Vehicle width		approx. 1470 mm
Vehicle height without flatbed (attached state)		approx. 1500 mm
Axle load		750 kg (technical 850 kg)
Drawbar load		75 kg
Tire		145R13 (max. 425 kg)
Axis		AL-KO UBR 850-4, unbraked
Shaft		Fixed to the rail package with ball coupling AK 7 V can be swivelled downwards
Support		4x pluggable diagonally arranged
Span		approx. 2.00 x 2.50 m
Rotary unit		Kingpins with plain bearings
Rotation angle		endlessly
Drive		Hydraulic power unit with 2.6 kW, 230V, 50Hz or Honda GX 200 petrol engine, 4.1 kW (5.5 hp)
Carriage speed		Approx. 28 m/min
Load winch/extension winch		hydraulic
Load winch rope	Length	approx. 55 m (D=6)
Rails	Number of rails	5 (1 – 5; W-Profile)
	Package length	approx. 5250 mm
	extendable to	approx. 20.8 m
	extendable with	Elbow and 2 m extension
Track width		540 mm

Dimensions and technical data are subject to change!